


PLAN

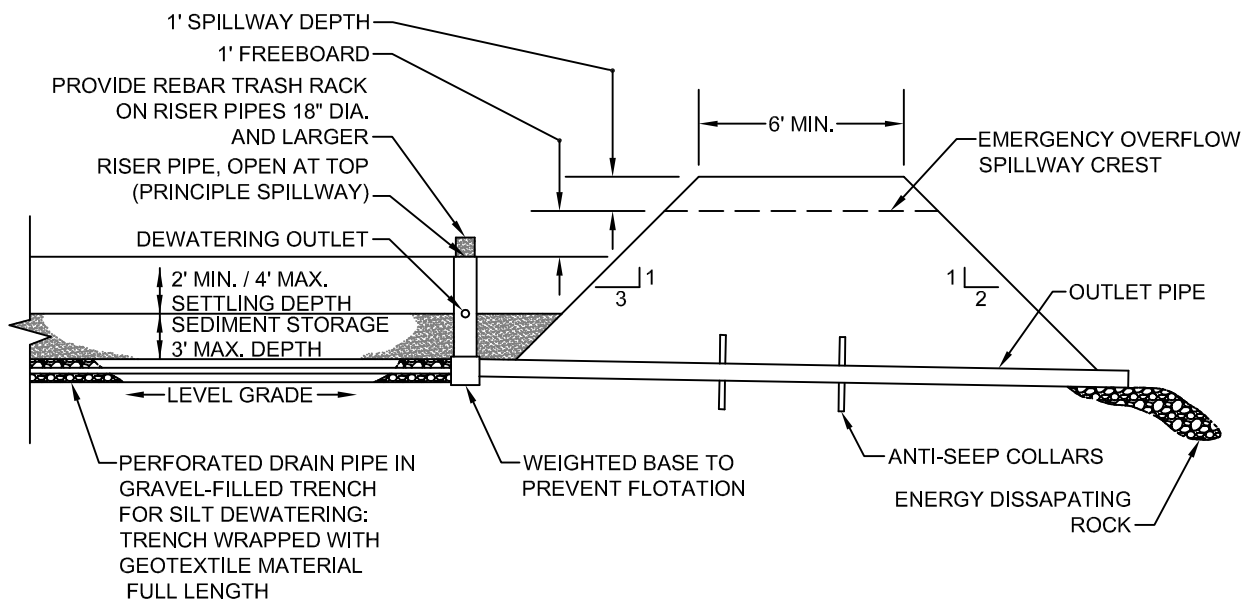

SECTION A - A

NOTES:

1. SEDIMENT DEWATERING MAY BE ACCOMPLISHED WITH PERFORATED DRAIN PIPE IN ANY TRENCH AS SHOWN OR WITH A PERFORATED RISER COVERED WITH GEOTEXTILE AND GRAVEL "CONE".
2. A GEOTEXTILE FENCE OR SIMILAR FILTER MUST BE CONSTRUCTED TO FILTER RUNOFF FROM THE POND PRIOR TO DISCHARGE FROM THE CONSTRUCTION SITE.
3. TOP AND OUTSIDE FACE OF BERM SHALL BE STABILIZED WITH AN APPROVED GROUND COVER.

TEMPORARY SEDIMENT POND

STANDARD PLAN:
EC - 070

DATE: **FEB. 2007**

CITY ENGINEER APPROVAL:

Longview: **C.B.**

Kelso: **S.Z.**